



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 ; <b>C08K 5/5333, 5/5357, C08L 63/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/00451</b>
		(43) International Publication Date: <b>7 January 1999 (07.01.99)</b>
(21) International Application Number: <b>PCT/US98/13618</b> (22) International Filing Date: <b>25 June 1998 (25.06.98)</b> (30) Priority Data: <b>9713526.3</b> <b>26 June 1997 (26.06.97)</b> <b>GB</b> (71) Applicant (for all designated States except US): <b>THE DOW CHEMICAL COMPANY [US/US]; 2030 Dow Center, Midland, MI 48674 (US).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>GAN, Joseph [FR/FR]; 100, route du Polygone, F-67100 Strasbourg (FR). GOODSON, Alan [GB/DE]; Gutenbergstrasse 8, D-77836 Rheinmuenster (DE). KOENIG, Raymond, A. [FR/FR]; 2, rue du Hohwald, F-67550 Vendenheim (FR). EVERETT, John, P. [GB/DE]; Panoramastrasse 30, D-77815 Buehl (DE).</b> (74) Agent: <b>LADD, Thomas, A.; The Dow Chemical Company, Patent Dept., P.O. Box 1967, Midland, MI 48641-1967 (US).</b>		(81) Designated States: <b>CN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  Published With international search report.

(54) Title: **A FLAME RETARDANT EPOXY RESIN COMPOSITION.**

## (57) Abstract

A novel epoxy resin having reduced flammability is presented. Phosphonic acid esters in an amount of from 0.2 to 5 percent phosphorous in epoxy resin are employed. Electrical laminate circuit boards having reduced flammability may be made from these compositions.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NI	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 99/00451

PCT/US98/13618

# A FLAME RETARDANT EPOXY RESIN COMPOSITION.

The present invention relates to curable epoxy-resin-containing formulations, and particularly to formulations useful for making laminates for printed wiring boards.

5

It is known to make electrical laminates and other composites from a fibrous reinforcement and an epoxy-containing matrix resin. Examples of suitable processes usually contain the following steps:

10

(1) an epoxy-containing formulation is applied to a substrate by rolling, dipping, spraying, other known techniques and/or combinations thereof. The substrate is typically a woven or nonwoven fiber mat containing, for instance, glass fibers.

15

(2) The impregnated substrate is "B-staged" by heating at a temperature sufficient to draw off solvent in the epoxy formulation and optionally to partially cure the epoxy formulation, so that the impregnated substrate can be handled easily. The "B-staging" step is usually carried out at a temperature of from 90°C to 210°C and for a time of from 1 minute to 15 minutes. The impregnated substrate that results from B-staging is called a prepreg. The temperature is most commonly 100°C for composites and 130°C to 200°C for electrical laminates.

20

25

(3) One or more sheets of prepreg are stacked in alternating layers with one or more sheets of a conductive material, such as copper foil, if an electrical laminate is desired.

30

(4) The laid-up sheets are pressed at high temperature and pressure for a time sufficient to cure the resin and form a laminate. The temperature of lamination is usually between 100°C and 230°C, and is most often

35

WO 99/00451

PCT/US98/13618

between 165°C and 190°C. The lamination step may also be carried out in two or more stages, such as a first stage between 100°C and 150°C and a second stage at between 165°C and 190°C. The pressure is usually between 50 N/cm<sup>2</sup> and 500 N/cm<sup>2</sup>. The lamination step is usually carried on for from 1 to 200 minutes, and most often for 45 to 90 minutes. The lamination step may optionally be carried out at higher temperatures for shorter times (such as in continuous lamination processes) or for longer times at lower temperatures (such as in low energy press processes).

(5) Optionally, the resulting copper-clad laminate may be post-treated by heating for a time at high temperature and ambient pressure. The temperatures of post-treatment are usually between 120°C and 250°C. The post-treatment time usually is between 30 minutes and 12 hours.

It is conventional in the preparation of epoxy-containing laminates to incorporate into the epoxy resin composition various additives to improve the flame-retardancy of the resulting laminate. Many types of flame retardant additives have been suggested, but the additives which are most widely used commercially are halogen containing additives, such as tetrabromodiphenylolpropane, or epoxy resins prepared by reacting diglycidyl ether of bisphenol-A with tetrabromodiphenylolpropane. Typically, in order to reach the desired fire retardancy level (V-0 in the standard "Underwriters Laboratory" test method UL 94) levels of such compounds are required which provide a bromine content of from 10 to 25 weight percent based on the total polymer weight in the product.

Although halogen containing fire-retardant additives are effective, they are considered by some to be undesirable from an environmental standpoint, and in recent years there has been increasing interest in the formulation of halogen-free epoxy resins, which are able to meet the fire retardancy requirements.

WO 99/00451

PCT/US98/13618

Proposals have been made to use phosphorus based flame retardants instead of halogenated fire retardants (see, for example EP-A-0384939, EP-A-0384940, EP-A-0408990, DE-A-4308184, DE-A-4308185, DE-A-4308187, WO-A-96/07685, and WO-A-96/07686. In these formulations the phosphorus flame retardant was pre-reacted to form a di or multifunctional epoxy resin. This makes the epoxy resin relatively expensive.

The phosphonic acid esters are commercially available fire retardant materials (e.g., Amgard™ V19 and Amgard™ P45 - supplied by Albright and Wilson Ltd, United Kingdom). These phosphonic acid esters, may be solids or liquids. Alkyl and aryl substituted phosphonic acid esters are compatible with epoxy resins. In particular lower (i.e., C<sub>1</sub>-C<sub>4</sub>) alkyl esters of phosphonic acid are of value because they contain a high proportion of phosphorus, and are thus able to impart good fire retardant properties upon resins in which they are incorporated. However, it has been found by the present inventors that they are not satisfactory as a substitute for halogenated flame retardants in epoxy resins for the production of electrical laminates, because their use in amounts sufficient to provide the necessary flame retardancy increases the tendency of the resulting cured epoxy resin to absorb moisture. The moisture absorbency of the cured laminate board is very significant, because laminates containing high levels of moisture tend to blister and fail, when introduced to a bath of liquid solder at temperatures around 260°C, a typical step in the manufacture of printed wiring boards.

EP-A-0754728 describes the production of flame retardant epoxy resin systems by blending epoxy resins with phosphonic acid esters and incorporating them into the cured resin. This reference indicates that large quantities (in excess of 18 weight percent) of the phosphorus additive are needed in order for the resin system to meet UL 94 V-0.

We have now discovered that it is possible to produce epoxy resins which meet the desirable standards of fire retardancy

WO 99/00451

PCT/US98/13618

without the need for halogen-containing flame retardants, or at least employing significantly lower levels of such halogen-containing flame retardants than is conventional in the art, by employing relatively low levels of phosphonic acid ester flame  
5 retardant (to give 0.2 to 5 weight percent phosphorus in the solid resin), together with particular combinations of accelerator and catalyst, and, in preferred embodiments, particular types of epoxy resin. The accelerators and catalysts are generally known per se, but their use in conjunction with low levels of phosphonic acid  
10 ester fire retardants to obtain compositions which have both good fire retardancy, and yet sufficiently low water absorption has not hitherto been described.


According to the invention, there is provided a flame  
15 retardant epoxy resin composition containing no more than 10% by weight of halogen, comprising

- a) an epoxy resin,
- b) a phosphonic acid ester in an amount such as to  
20 provide from 0.2 to 5 weight percent phosphorus in the composition,
- c) a nitrogen-containing crosslinking agent having an amine functionally of at least 2, in an amount of from 10 to 80 percent of the stoichiometric amount  
25 needed to cure the epoxy resin,
- d) from 0.1 to 3 weight percent of a catalyst capable of promoting the reaction of the phosphonic acid ester with the epoxy resin and promoting the curing of the epoxy resin with the crosslinker, and optionally,
- e) a Lewis acid in an amount of up to 2 moles, per mole  
30 of catalyst.


The phosphonic acid ester employed in the present invention is preferably an ester of the formula

WO 99/00451

PCT/US98/13618



or




wherein R<sup>1</sup> is C<sub>1</sub> to C<sub>6</sub> alkyl,

5 R<sup>2</sup> is C<sub>1</sub> to C<sub>6</sub> alkylene,

R<sup>3</sup>, and R<sup>3</sup>, are each C<sub>1</sub> to C<sub>6</sub> alkyl, or C<sub>6</sub> to C<sub>10</sub> aryl, or R<sup>2</sup> and R<sup>3</sup> taken together represent the residue of a glycol or a polyol.


Preferred phosphonic acid esters are for example esters of methanephosphonic acid with polyhydroxy compounds such as glycols, and polyols. Such phosphonic acid esters of polyhydroxy compounds can have polymeric and/or cyclic structures.

Specific preferred examples are polymers with repeating units such as:




15

and/or cyclic structures such as



n is 2 to 10, R<sup>5</sup> is a C<sub>1</sub> to C<sub>6</sub> alkylene group or the residue of a glycol or polyol,

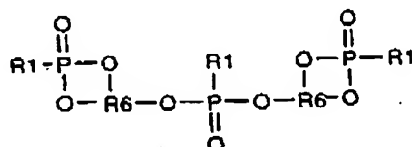


20

WO 99/00451


PCT/US98/13618

R<sup>6</sup> is the residue of a triol, for example glycerol or trimethylol propane.

The phosphonic acid ester is preferably an ester having methyl or methylene adjacent to phosphorous. Preferred phosphonic acid esters are those of the formula,



or



In order to obtain satisfactory resistance to water absorption, it is important that the amount of the phosphonic acid ester is from 1 to 18 weight percent, preferably from 4 to 15 weight percent, more preferably from 7 to 15 weight percent, based on the total of the epoxy resin composition. The phosphonic acid ester content is preferably such as to provide a total phosphorous content in the composition, of from 0.2 to 5 weight percent, more preferably from 1 to 5 weight percent.

The compositions of the invention contain a catalyst capable of promoting the reaction of the phosphonic acid ester with the epoxy resin and promoting the curing of the epoxy resin.

The catalyst may comprise a single catalyst component, capable both of promoting the reaction of the phosphonic acid ester with the epoxy resin and of promoting the curing of the epoxy resin. Alternatively, the catalyst may be a combination of components which favor one aspect of the resin curing over another.

Examples of suitable catalyst materials include compounds containing or amine, phosphine, ammonium, phosphonium, arsonium or sulfonium moieties. Particularly preferred catalysts are the heterocyclic nitrogen containing compounds. Preferably a Lewis acid is also employed, especially when the catalyst is an amine,



WO 99/00451

PCT/US98/13618

particularly a heterocyclic nitrogen containing amine.

Catalysts (as distinguished from cross-linkers) preferably contain on average no more than about 1 active hydrogen moiety per molecule.

Active hydrogen moieties include hydrogen atoms bonded to an amine group, a phenolic hydroxyl group, or a carboxylic acid group. For instance, the amine and phosphine moieties in catalysts are preferably tertiary amine or phosphine moieties; and the ammonium and phosphonium moieties are preferably quaternary ammonium and phosphonium moieties.

10

Among preferred tertiary amines that may be used as catalysts are those mono- or polyamines having an open-chain or cyclic structure which have all of the amine hydrogen replaced by suitable substituents, such as hydrocarbyl radicals, and preferably aliphatic, cycloaliphatic or aromatic radicals.

15

Examples of these amines include, among others, , methyl diethanol amine, triethylamine, tributylamine, dimethyl benzylamine, triphenylamine, tricyclohexyl amine, pyridine and quinoline. Preferred amines are the trialkyl, tricycloalkyl and triaryl amines, such as triethylamine, triphenylamine, tri-(2,3-dimethylcyclohexyl)amine, and the alkyl dialkanol amines, such as methyl diethanol amines and the trialkanolamines such as triethanolamine. Weak tertiary amines, for example, amines that in aqueous solutions give a pH less than 10 in aqueous solutions of 1 M concentration, are particularly preferred. Especially preferred tertiary amine catalysts are benzyldimethylamine and tris-(dimethylaminomethyl) phenol.

20

25

Examples of suitable heterocyclic nitrogen catalysts include those described in US-A-4,925,901. Preferable heterocyclic secondary and tertiary amines or nitrogen-containing catalysts which can be employed herein include, for example, imidazoles, benzimidazoles, imidazolidines, imidazolines, oxazoles, pyrroles, thiazoles, pyridines, pyrazines, morpholines, pyridazines, pyrimidines, pyrrolidines, pyrazoles, quinoxalines, quinazolines, phthalazines, quinolines, purines, indazoles, indoles, indolazines, phenazines, phenarsazines, phenothiazines, pyrrolines, indolines,

30

35

WO 99/00451

PCT/US98/13618

piperidines, piperazines and combinations thereof. Especially preferred are the alkyl-substituted imidazoles; 2,5-chloro-4-ethyl imidazole; and phenyl-substituted imidazoles, and mixtures thereof. Even more preferred are N-methylimidazole; 2-methylimidazole; 5 2-ethyl-4-methylimidazole; 1,2-dimethylimidazole; and 2-methylimidazole. Especially preferred is 2-phenylimidazole.

Examples of heterocyclic nitrogen donor compounds which are preferably used in combination with Lewis acids are those described in EP-A-526488, EP-A-0458502- & GB-A-9421405.3. In these 10 references the Lewis acids are described as inhibitors because they reduce the initial rate of the chemical reaction. Examples of suitable Lewis acids include halides, oxides, hydroxides and alkoxides of zinc, tin, titanium, cobalt, manganese, iron, silicon, aluminium, and boron, for example Lewis acids of boron, and 15 anhydrides of Lewis acids of boron, for example boric acid, metaboric acid, optionally substituted boroxines (such as trimethoxyboroxine), optionally substituted oxides of boron, alkyl borates, boron halides, zinc halides (such as zinc chloride) and other Lewis acids that tend to have a relatively weak conjugate 20 base. Preferably the Lewis acid is a Lewis acid of boron, or an anhydride of a Lewis acid of boron, for example boric acid, metaboric acid, an optionally substituted boroxine (such as trimethoxy boroxine, trimethyl boroxine or triethyl boroxine), an optionally substituted oxide of boron, or an alkyl borate. The most 25 preferred Lewis acid is boric acid.

These Lewis acids are very effective in curing epoxy resins when combined with the heterocyclic nitrogen containing compounds, referred to above. In particular, they are able to 30 incorporate the phosphonic acid ester into the epoxy resin during curing.

The Lewis acids and amines can be combined before mixing into the formulation or by mixing with the catalyst in-situ, to make 35 a curing catalyst combination.

WO-99/00451

PCT/US98/13618

The amount of the Lewis acid employed is preferably at least 0.1 moles of Lewis acid per mole of heterocyclic nitrogen compound, more preferably at least 0.3 moles of Lewis acid per mole of heterocyclic nitrogen compound.

The formulation preferably contains no more than three moles of Lewis acid per mole of catalyst and more preferably contains no more than 2 moles of Lewis acid per mole of catalyst. The total amount of the catalyst is from 0.1 to 3 weight percent, based on the total weight of the composition, preferably from 0.1 to 2 percent.

All of the aforementioned catalyst materials will catalyze to some extent both the reaction of the phosphonic acid ester with the epoxy resin, and the curing of the epoxy resin. However, (1,8-diazabicyclo (5,4,0) undec-7-en (DBU) tends to favor the phosphonic ester - epoxy reaction over the epoxy curing reaction.

The nitrogen-containing crosslinking agent has an amine functionality of at least 2. Suitable multifunctional crosslinkers are described in numerous references such as Vol. 6 Encyclopaedia of Poly. Sci. & Eng., "Epoxy resins" at 348-56 (J. Wiley & Sons 1986). Examples of suitable nitrogen-containing cross-linkers include polyamines, polyamides, sulphanilamide, diaminodiphenylsulfone and diaminodiphenyl methane. The preferred crosslinking agent is dicyandiamide.

The amount of the nitrogen-containing crosslinking agent is from 10 to 80 percent of the stoichiometric quantity needed to cure the epoxy content of the epoxy resin in the formulation.

The total amount of nitrogen in the composition (including nitrogen derived from any nitrogen-containing compounds which may form part of the catalyst, or advancement monomers for the epoxy resin) is preferably from 1 to 8 percent by weight.

The quantity of nitrogen-containing cross-linking agent is preferably such that the formulation contains a stoichiometric

WO 99/00451


PCT/US98/13618

excess of epoxy resin over the nitrogen-containing cross-linking agent. (For the purposes of this application, dicyandiamide is taken as having 6 curing sites per molecule.) The formulation thus contains no more than 0.8 equivalents, preferably no more than 0.75, more preferably no more than 0.6, and most preferably no more than 0.5 equivalents of nitrogen-containing cross-linking agent per epoxide equivalent. When the multifunctional cross-linker is dicyandiamide, the formulation preferably contains at least 0.65 weight percent and more preferably at least 1.9 weight percent of dicyandiamide. The amount of dicyandiamide is preferably no more than 5.2 weight percent and more preferably no more than 2.6 weight percent.

The epoxy resin used in the present invention is a material which possesses on average more than 1 and preferably at least 1.8, more preferably at least 2 epoxy groups per molecule. In the broadest aspect of the invention, the epoxy resin may be any saturated or unsaturated aliphatic, cycloaliphatic, aromatic or heterocyclic compound which possesses more than one 1,2-epoxy group. Examples of heterocyclic epoxy compounds are diglycidylhydantoin or triglycidyl isocyanurate (TGIC).

The epoxy resin is preferably one which has no lower alkyl aliphatic substituents, for example the glycidyl ether of a phenol novolac, or the glycidyl ether of bisphenol-F.

The most preferred epoxy resins are epoxy novolac resins (sometimes referred to as epoxidised novolac resins, a term which is intended to embrace both epoxy phenol novolac resins and epoxy cresol novolac resins). Such compounds have the following general formula:

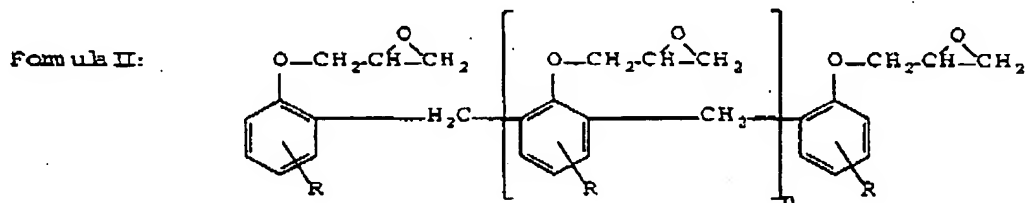

WO 96/00451

PCT/US96/13618

wherein "R" is hydrogen or a C1-C3 alkyl, e.g., methyl and "n" is 0 or an integer from 1 to 10.

Epoxy novolac resins (including epoxy cresol novolac resins) are readily commercially available, for example under the trade names D.E.N.<sup>TM</sup>, Quatrex<sup>TM</sup>, Tactix<sup>TM</sup>, (Trademarks of The Dow Chemical Company). The materials of commerce generally comprise mixtures of various species of the above formula and a convenient way of characterizing such mixtures is by reference to the average, n', of the values of n for the various species. Preferred epoxy novolac resins for use in accordance with the present invention are those in which n' has a value of from about 2.05 to about 10, more preferably from about 2.5 to about 5.

Preferably the epoxy resin is the reaction product of an epoxy compound containing at least two epoxy groups for example an epoxy compound of the kind describe above, and a chain extender. The chain extending monomer may be a phenolic chain extender containing on average more than one, and less than three phenolic hydroxyl groups per molecule. Such phenolic chain extenders preferably contain on average 1.8 to 2.1 phenolic hydroxyl groups and more preferably contains about 2 phenolic hydroxyl groups per molecule. The phenolic chain extender is preferably a dihydric phenol. The chain extender is preferably reacted with the epoxy compound to form the epoxy resin before formulation of the composition with the flame retardant, hardener and the catalyst. However it is also possible to add the chain extender and the epoxy resin compound to the composition in order to form the epoxy resin in-situ.

The epoxy resin is preferably one which is solid at 20 degrees C, for example one which has a softening point of 50°C or higher, as defined by the Mettler softening point method ASTM D3104 and DIN 51920. The phenolic chain extender may itself be the reaction product of a diol and an epoxy compound.

For example, it may be the reaction product of a diol or a compound containing two phenolic groups, with a glycidyl ether of a phenol novolac or with a glycidyl ether of bisphenol-F. Preferably, less than 50 percent of the carbon atoms in the chain

WO 99/00451

PCT/US98/13618


extender are present in aliphatic groups, more preferably less than 30 percent, and most preferably 0 percent.

Examples of particularly suitable phenolic chains extenders include resorcinol, catechol, hydroquinone, bisphenol, bisphenol A, bisphenol AP (1,1-bis(4-hydroxyphenyl)-1-phenylethane), bisphenol F, and bisphenol K.

It is greatly preferred however that the chain extender is a nitrogen-containing monomer for example, an isocyanate, and amine or amide.

Preferred nitrogen-containing chain extenders include, polyisocyanate compounds which form epoxy-terminated polyoxazolidones as described in US-A-5,112,932. Preferably, the polyisocyanate compound used in the present invention is methylene bis(phenylisocyanate) (MDI). MDI is preferably employed in its commercially available form, which includes, pure 4-4, MDI, isomers and functional homolog mixtures (commonly designated as "polymeric MDI"). Isocyanate compounds also useful in the present invention include, for example, toluene diisocyanate (TDI) and isomers thereof.

The nitrogen-containing chain extender may also be, for example an amine- or amino amide-containing compound which forms epoxy-terminated amine compounds having two N-H bonds capable of reacting with an epoxy group. Amine-containing compounds useful in the present invention include, for example, mono-primary amines of the general formula R-NH<sub>2</sub> wherein R is alkyl, cycloalkyl or aryl moieties; di-secondary amines of the general formula R-NH-R'-NH-R'' wherein R, R' and R'' are alkyl, cycloalkyl or aryl moieties; and heterocyclic di-secondary amines wherein one or both of the N atoms is part of a nitrogen containing heterocyclic compound such as:



For reactivity reasons, and in order to better control the epoxy advancement reaction with the di-functional amines, di-secondary amines or primary amines having sterically hindered amine groups are preferred as for example 2,6-dimethyl cyclohexylamine or 2,6-xylylidine (1-amino-2,6-dimethylbenzene).

WO 99/00451

PCT/US98/13618

Amino amide-containing compounds useful as chain extenders in the present invention include for example derivatives of carboxylic acid amides as well as derivatives of sulfonic acid amides having additionally one primary or two secondary amino groups. Preferred examples of such compounds are amino-aryl carboxylic acid amides and amino-arylsulfonamides. A preferred compound of this group is, for example, sulfanilamide (4-amino benzenesulfonamide) and anthranilamide (2-aminobenzamide).

The amount of the chain extender is preferably from 5 to 30 weight percent, based on the epoxy resin.

The compositions of the invention may also contain one or more additional flame retardant additives, for example red phosphorous or liquid or solid phosphorus containing compounds, for example, ammonium polyphosphate, a phosphite, or 9,10-dihydro-9-oxa-phosphaphenanthrene-10-oxide (HCA), phosphazenes, nitrogen containing fire retardants and/or synergists, for example melamines, urea, cyanamide, guanidine, cyanuric acid, isocyanuric acid and derivatives of those nitrogen containing compounds, halogenated flame retardants, halogenated epoxy resins (especially brominated epoxy resins) synergistic phosphorus-halogen containing chemicals or compounds containing salts of organic acids, inorganic metal hydrates, boron or antimony. Examples of suitable additional flame retardant additives are given in a paper presented at "Flame retardants - 101 Basic Dynamics - Past efforts create future opportunities", Fire Retardants Chemicals Association, Baltimore Marriot Inner Harbour Hotel, Baltimore Maryland, March 24-27 1996. When additional fire retardants are present which contain phosphorous, they are generally present in amounts such that the total phosphorous content of the epoxy resin composition is from 0.2 to 5 weight percent.

The compositions of the invention can be produced by mixing all the components together in any order. Preferably compositions of the invention can be produced by preparing a first composition comprising the epoxy resin, and the second composition comprising the curing catalyst. Either the first or the second composition also comprises the phosphonic acid ester, nitrogen-containing crosslinking agents. All other components may be present.

WO 99/00451

PCT/US98/13618

in the same composition, or some may be present in the first, and some in the second. The first composition is then mixed with the second composition, and cured to produce a fire retardant epoxy resin.

5

A number of preferred embodiments of the invention are illustrated, in the following specific Examples.

#### Preparation A

10

#### General production procedure for the epoxy resin (a) with high nitrogen content

92.5 parts by weight of a commercially available epoxy novolac resin with a functionality of 3.6 (D.E.N. 438) was heated up to 100°C under nitrogen purge in a reactor equipped with an electrically driven stirrer, air and nitrogen inlets, sample port, condenser and thermocouple. 1500 ppm (based on the total of epoxy novolac resin and isocyanate in the product) of 1,8-diazabicyclo(5,4,0) undec-7-en (a reaction catalyst AMICURE DBU-ETM by Anchor) was added and the mixture and was heated to 130-140°C. 7.5 parts MDI (ISONATE™ M143 available from The Dow Chemical Company) was charged into the epoxy resin via an additional funnel, portion by portion. The reaction temperature rose to at least 150°C by the heat of reaction. After the end of the addition, the reaction mixture was increased to 165°C and maintained until the target epoxy equivalent weight of the copolymer of MDI and epoxy novolac resin was reached. The solid resin was further diluted with methylethylketone and propylene glycol monomethyl ether ( ) (50/50) to a 80 weight percent solid solution and cooled to room temperature.

35

#### Preparation B

#### General production procedure for hardener solutions

A phosphonic acid ester fire retardant (Amgard P45 or Amgard V19) was heated to 120°C under nitrogen purge in a reactor equipped with an electrically driven mechanical stirrer, air and



WO 99/00451

PCT/US98/13618

nitrogen inlets, sample port, condenser and thermocouple.  
 Dicyandiamide or sulfanilamide was added and stirred until  
 homogeneous mixture was obtained. Propylene glycol monomethyl ether  
 was added to the mixture to make an 80 weight percent solids  
 5 solution. Optionally the insoluble fire retardant additives were  
 added to the hardener solution before adding it to the resin  
 solution.

Production procedure for the polyepoxy / polyisocyanate / HCA  
 10 copolymer ("resin A")

3.77 weight percent of 9,10-dihydro-9-oxa-phospha-  
 phenanthrene-10-oxide (HCA) was added to 96.23 weight percent of the  
 solid epoxy resin produced in Preparation A at about 160°C and held  
 15 until a target EEW of 232 was reached. The solid was cooled to about  
 130°C and methylethylketone and propylene glycol monomethyl ether  
 (50/50) were added to make a solution of 75 weight percent solid  
 content.

20 Example 1 - Preparation of "resin B" Boric acid in  
 methanol was added to the D.E.N. 438/MDI copolymer. When the mixture  
 was complete the phosphosphoric acid ester Amgard V19 ) flame  
 retardant was mixed into the resin. 2-methylimidazole catalyst was  
 added the resin solution. Lastly the dicyandiamide (7.5 weight  
 25 percent in a 50/50 mixture of dimethylformamide and propylene glycol  
 mono methyl ether was mixed in. The composition of the formulation  
 and the properties of the formulation, prepreps and laminates made  
 therefrom are given in the following table.

30 Preparation of Resins A and C to N

The epoxy resin solution, the hardener solution, the  
 catalyst solution (usually 50 weight percent solution in methanol)  
 and optionally boric acid solution were mixed at room temperature  
 with a mechanical stirrer for 15 minutes to make a homogeneous  
 35 mixture. Additional solvents (methylethylketone) was added to  
 adjust the varnish viscosity to 30-50 sec. on Ford cup N° 4. The  
 varnishes were aged overnight.

WO 99/00451

PCT/US98/13618

The varnishes were used to impregnate glass web (style Nr. 7628/36 amine silane finish by Porcher SA, France), using a Caratsch pilot treater (3 m long). The temperature of the hot air in the oven was 160-170°C. The varnish composition, treater condition, prepreg and laminate performance are summarized in Tables 1, 2, 3 and 4.

The IPC test methods employed are the electrical laminate industry standard (The Institute For Interconnection And Packaging Electronic Circuits, 3451 Church Street, Evanston, Illinois 60203), as follows.

Method	IPC-Test Method Number:
Reactivity (varnish)	IPC-TM-650-5.1.410
Rest Geltime @ 170 c, sec	IPC-TM-650-2.3.18
Mil Flow, wt. %	IPC-TM-650-2.3.17
Tg, °C	IPC-TM-650-2.4.25
Copper peel strength	IPC-TM-650-2.4.8
NMP-pick-up	Dow method C-TS-AA-1012.00
Pressure Cooker Test, wt. % water pick-up & % passed solder bath @ 260 °C	IPC-TM-650-2.6.16
UL94 Flammability	IPC-TM-650-2.3.10

WO-99/00451

PCT/US98/13618

Table 1 : Formulations composition, properties, prepreg and laminate performance

COMPOSITION in parts solid by weight	B	C	D	E
Resin of Preparation A	86	84	84	
epoxy novolac resin, functionality 3.6				85
Amgard V19	14		14	
Amgard P45		14		14
Dicyandiamide dissolved in Amgard P45 or Amgard V19)		2 (in Amgard P45)	2 (in Amgard V19)	2 (in Amgard P45)
Boric acid	1	0.3		-
2-Phenylimidazole		1.7	2	1
2-Methylimidazole	1			
Additional solvent		MEK	MEK	MEK
Dicyandiamide solution (7.5wt%)	1			
VARNISH CHARACTERISTICS				
Viscosity (Ford cup #4), sec	76	38	126	36
Reactivity, sec				
Geltime @ 170 °C	85	102	151	109
@ 150 °C		242		322
Treater conditions				
Oven temp. °C	185	168	152	
Winding speed, m/min	2.3	1.4	1.1	
Prepreg characteristics				
Resin content, wt. %	41	43.4	45	42.6
Rest Geltime @ 170°C, sec	melted	10	14	15
Mil Flow, wt. %	10	10.5	15	15.3
LAMINATE PERFORMANCE				
Laminate cure cycle	1 hour @ 170 °C 1 hour @ 230 °C	1 hour @ 170 °C 1 hour @ 230 °C	100 mins @ 200°C 90 mins @ 230°C	1 hour @ 170 °C 1 hour @ 230 °C
Laminate thickness, mm	1.4-1.5	1.52-1.57	1.7-1.8	1.47- 1.70
Glass transition temperature - Tg1/2, °C	158/159	158/162	149/146	not measured
Press Cooker Test, wt. % water pick-up / % passed solder bath @260 °C	wt% / % pass	wt% / % pass	wt% / % pass	wt% / % pass
30 min.	0.38/100	n.d. / 100	0.53 / 100	
40 min.				
50 min.	0.53/100			
60 min.		0.64 / 100		0.60 / 100
Total burning time, sec	69 & 35	36	30	46
UL94	V-1 & V-0	V-0	V-0	V-0

WO 99/00451

PCT/US98/13618

Table 2: Formulation compositions, properties, prepreg and laminate performance

COMPOSITION in parts solid by weight	F	G	Resin A
Resin of Preparation A	79.5	83.5	
Resin of Preparation A - SANKO/HCA			81.5
Amgard P45	14	14	12
Dicyandiamide (Dissolved in Amgard P45 )		2	
Sulfanilamide (Dissolved in Amgard P45)	6		6
Boric acid	0.5	0.5	0.5
2-Phenylimidazole	2.0	2.0	2.0
Additional solvent	MEK	MEK	MEK
VARNISH CHARACTERISTICS			
Viscosity (Ford cup #4), sec	45	39	45
Reactivity , sec Geltime @ 170°C @ 150°C	90 240	87 220	132 -
Treater conditions			
Oven temp. °C	163	163	161
Winding speed, m/min	1.2	1.1	0.7
PREPREG CHARACTERISTICS			
Resin content, wt. %	45	44	45
Rest Geltime @ 170 C, sec	8	10	24
Mil Flow , wt. %	13	15	21
LAMINATE PERFORMANCE			
Laminate cure cycle	90 min @190 °C		
Laminate thickness, mm	1.6-1.7	1.6-1.8	1.57-1.70
Glass transition temperature - Tg1/2, C	160/166	161/167	157/160
Copper peel strength N/cm	15.7	17.0	16.3
NMP-pick-up, %			0.08
Press Cooker Test, wt. % water pick-up & % passed solder bath @260 °C	wt% / % pass	wt% / % pass	wt% / % pass
40 min.	0.52 / 100	0.6 / 75	0.53/100
60 min.	0.64 / 75	0.75 / 75	0.69/50
Total burning time, sec	53	47	34
UL94	V-1	V-0	V-0

WO 99/00451

PCT/US98/13618

Table 3 : Varnish compositions, properties, prepregs and laminates performance obtained from 2-methylimidazole catalysed system.

COMPOSITION in parts solid by weight	I	J
Resin of Preparation A	85	86
Amgard V19	14	14
Dicyandiamide (Dissolved in Amgard V19)	1	1
Boric acid	1	-
2-Methylimidazole	1	1
Additional solvent	MEK	MEK
VARNISH CHARACTERISTICS		
Viscosity (Ford cup #4), sec	132	137
Reactivity, sec		
Geltime @ 170°C	109	70
@ 150°C	178	150
Treater conditions		
Oven temp. °C	160	160
Winding speed, m/min	0.8	1.3
Prepreg characteristics		
Resin content, wt. %	45.1	41.2
Rest Geltime @ 170 °C, sec	0	9
Mil Flow, wt. %	17.0	18.0
LAMINATE PERFORMANCE		
Laminate cure cycle	90 min. @230 °C	
Laminate thickness, mm	1.6-1.7	1.40-1.48
Glass transition temperature - T <sub>g1/2</sub> , °C	166 / 169	143 / 148
Press Cooker Test, wt. % water pick-up & % passed solder bath @260 °C	wt% / % pass	wt% / % pass
40 min.	0.57 / 100	0.55 / 100
60 min.	0.77 / 0	0.75 / 0
Total burning time, sec	54	49
UL94	V-1	V-0

WO 99/00451

PCT/US98/13618

Table 4: Formulation compositions, properties, prepreg and laminate performance of filler containing systems

COMPOSITION in parts solid by weight	K	L	M
Resin of Preparation A	84.00	84.00	74.50
Amgard P45	10.00	10.00	10.00
Dicyandiamide (Dissolved in P45 )	2.00	2.00	
Sulfanilamide (Dissolved in P45)			6.00
Hostaflam <sup>TM</sup> AP 423	5.00		7.00
Ammonium Polyphosphate			
Hostaflam TP RP 605		1.50	
Red phosphorus		maximum	
Boric acid	0.5	0.5	0.5
2-Phenylimidazole	2.0	2.0	2.0
Additional solvent	MEK/Dowanol PM	MEK/Dowanol 1 PM	MEK/Dowanol PM
VARNISH CHARACTERISTICS			
Viscosity (Ford cup #4), sec	120	63	60
Reactivity , sec Gelttime @ 170°C @ 150°C	77	70	77
Treater conditions			
Oven temp. °C	157	157	157
Winding speed, m/min	1.3	1.4	1.5
PREPREG CHARACTERISTICS			
Resin content, wt. %	39.5	41	40.8
Rest Gelttime @ 170 c, sec	23	20	23
Mil Flow , wt. %	11.9	16.5	15.7
LAMINATE PERFORMANCE			
Laminate cure cycle	190°C for 90 mins	190 for 90 mins	190 for 90 mins
Laminate thickness, mm	1.45	1.55	1.45
Glass transition temperature - Tg1/2, C	166.6/170.7	170.2/171. 4	172.7/17 1.3
Copper peel strength N/cm			
NMP-pick-up, %	0.083	0.034	0.017
Press Cooker Test, w. t% water pick-up & % passed solder bath @260 °C	wt% / % pass	wt% / % pass	wt% / % pass
60 min.	100	100	50
75 min.	50	100	50
90 min	0	50	
Total burning time , sec	32	29	26
UL94	V-0	V-0	V-0

WO 99/00451

PCT/US98/13618

# Claims

1. A flame retardant epoxy resin composition containing no more than 10 percent by weight of halogen, comprising

- a) an epoxy resin,
- 5 b) a phosphonic acid ester in an amount such as to provide from 0.2 to 5 weight percent phosphorus in the composition,
- c) a nitrogen-containing crosslinking agent having an amine functionality of at least 2, in an amount of  
10 from 10 to 80 percent of the stoichiometric amount needed to cure the epoxy resin,
- d) from 0.1 to 3 weight percent of a catalyst capable of promoting the reaction of the phosphonic acid ester with the epoxy resin and promoting the curing of the  
15 epoxy resin with the crosslinker and, optionally
- e) a Lewis acid in an amount of up to 2 moles per mole of catalyst.

2. A composition as claimed in Claim 1, wherein the epoxy resin has a softening point at least 50 degrees C (by ASTM  
20 D3104).

3. A composition as claimed in Claim 1 or Claim 2, wherein the epoxy resin contains not more than 2 alkyl groups per molecule.

4. A composition as claimed in Claim 3, wherein the  
25 epoxy resin contains not more than 1 alkyl group per molecule.

5. A composition as claimed in any one of the preceding Claims, wherein the epoxy resin is the reaction product [or a mixture] of a monomer containing at least two epoxy groups, and a difunctional chain-extending monomer, or wherein the composition  
30 additionally comprises a difunctional chain-extending monomer.

6. A composition as claimed in Claim 5, wherein the difunctional chain-extending monomer is -methylene bis(phenylisocyanate) (MDI), Toluenediisocyanate (TDI), 2,6-dimethylhexylamine, sulfanilamide or anthranilamide.

WO 99/00451

PCT/US98/13618

7. A composition as claimed in Claim 5 or Claim 6, wherein the monomer containing at least two epoxy groups is a glycidyl ether of a phenol novolac or a glycidyl ether of bisphenol-F.

5 8. A composition as claimed in any one of the preceding Claims, wherein the amount of the epoxy resin based on solids is from 50-95 weight percent, of the composition.

9. A composition as claimed in any one of the preceding Claims, wherein the amount of the epoxy resin is from 80-90 weight  
10 percent of the composition, based on solids.

10. A composition as claimed in any one of the preceding Claims, wherein the phosphonic acid ester is an ester of the formula



15 wherein R<sup>1</sup> is C<sub>1</sub> to C<sub>3</sub> alkyl.

R<sup>4</sup> is C<sub>1</sub> to C<sub>3</sub> alkylene.

R<sup>2</sup>, and R<sup>3</sup>, are each C<sub>1</sub> to C<sub>3</sub> alkyl, or C<sub>6</sub> to C<sub>10</sub> aryl, or R<sup>2</sup> and R<sup>3</sup> taken together represent the residue of a glycol or a polyol.


11. A composition as claimed in Claim 10, wherein

20 R<sup>1</sup> is methyl

R<sup>4</sup> is methylene, and

R<sup>2</sup>, and R<sup>3</sup>, are each independently methyl, ethyl, phenyl, or hydroxyphenyl.

12. A composition as claimed in any one of the preceding  
25 Claims, wherein the phosphonic acid ester is a compound of the formula

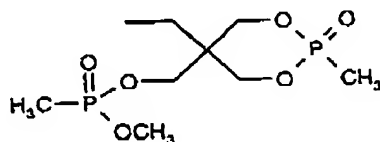


or

-22-



WO 99/00451

PCT/US98/13618



13. A composition as claimed in Claim 11 or claim 12,,  
wherein the amount of the phosphonic acid ester is from 4 to 15  
5 weight percent of the composition.

14. A composition as claimed in Claim 13, wherein the  
amount of the phosphonic acid ester is from 7 to 15 weight percent  
of the composition.

15. A composition as claimed in any one of the preceding  
10 Claims wherein the amount of the phosphonic acid ester is such as to  
provide a phosphorous content in the composition of from 0.5 to 5  
weight percent.

16. A composition as claimed in Claim 15 wherein the  
amount of the phosphonic acid ester is such as to provide a  
15 phosphorous content in the composition of from 1 to 3.8 weight  
percent.

17. A composition as claimed in Claim 16 wherein the  
amount of the phosphonic acid ester is such as to provide a  
phosphorous content in the composition of from 1.4 to 3.1 weight  
20 percent.

18. A composition as claimed in any one of the preceding  
Claims, wherein the nitrogen-containing crosslinking agent having an  
amine functionality of at least 2 is dicyandiamide, sulfanilamide,  
diaminodiphenylsulfone, and/or diaminodiphenyl methane.

19. A composition as claimed in any one of the preceding  
25 Claims, wherein the total amount of nitrogen containing crosslinking  
agent in the composition is such as to provide no more than 80  
percent the stoichiometric quantity needed to react with the epoxy  
resin..

20. A composition as claimed in any one of the preceding.  
30 Claims, wherein the total amount of nitrogen containing compounds in

WO 99/00451

PCT/US98/13618

the composition is such as to provide a total nitrogen content of from 1 to 8 percent of the composition.

21. A composition as claimed in any one of the preceding claims wherein the catalyst comprises a single catalyst component, capable both of promoting the reaction of the phosphonic acid ester with the epoxy resin and of promoting the curing of the epoxy resin.

22. A composition as claimed in any one of claims 1 to 20, wherein the catalyst comprises a catalyst component which favors the phosphonic ester - epoxy reaction over the epoxy curing reaction.

23. A composition as claimed in Claim 22, wherein a catalyst composition is DBU.

24. A composition as claimed in any one of the preceding claims, wherein the total amount of catalysts is from 0.1 to 2 weight percent of the composition.

25. A composition as claimed in any one of the preceding claims, which also comprises an additional flame retardant additive.

26. A composition as claimed in claim 25, wherein the additional flame retardant additive is an ammonium polyphosphate, red phosphorous, a phosphite, 9,10-dihydro-9-oxa-phosphaphenanthrene-10-oxide (HCA), a phosphazene, a nitrogen containing fire retardant, a halogenated flame retardant, a halogenated epoxy resin, a phosphorus-halogen containing flame retardant, a salt of an organic acid, an inorganic metal hydrate, or a compound containing boron or antimony.

27. A method of preparing an epoxy resin composition comprising  
an epoxy resin,  
a phosphonic acid ester,  
a nitrogen-containing crosslinking agent, having an amine functionality of at least 2,  
a catalyst capable of promoting the reaction of the phosphonic acid ester with the epoxy resin, and capable of promoting the curing of the epoxy resin, and optionally

WO 99/00451

PCT/US98/13618

a Lewis acid in an amount of up to 2 moles per mole of catalyst, which method comprises preparing a first composition comprising the epoxy resin, and a second composition comprising the curing catalyst, wherein either the first or the second composition also  
 5 comprises the phosphonic acid ester and the nitrogen-containing crosslinking agent having an amine functionality of at least 2, mixing the first composition with the second composition, and curing the composition to produce a cured fire-retardant epoxy resin.

10 28. A method as claimed in Claim 27, wherein the phosphonic acid ester, nitrogen-containing crosslinking agent, and catalyst are all present in the second composition.

29. A method as claimed in Claim 27, wherein the phosphonic acid ester and nitrogen-containing crosslinking agent are  
 15 present in the first composition, and the catalyst is present in the second composition.

## INTERNATIONAL SEARCH REPORT

II. National Application No.  
PCT/US 98/13618

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 C08K5/5333 C08K5/5357 C08L63/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 C08K C08G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 754 728 A (HOECHST AG) 22 January 1997 cited in the application see page 3, line 49-53; claims 1,5,7,14; examples 3-6	1-29
A	EP 0 029 683 A (FORD MOTOR CO : FORD WERKE AG (DE); FORD FRANCE (FR)) 3 June 1981 see claim 1	1-29
A	LIU Y -L ET AL: "JOURNAL OF APPLIED POLYMER SCIENCE" JOURNAL OF APPLIED POLYMER SCIENCE, vol. 64, no. 7, 14 February 1997, pages 895-901, XP000722893 see tables I,II	1-29
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "Z" document member of the same patent family		
Date of the actual completion of the international search  29 September 1998		Date of mailing of the international search report  06/10/1998
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patendaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  Rodriguez, L

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 98/13618

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DEROUET D ET AL: "CHEMICAL MODIFICATION OF EPOXY RESINS BY DIALKYL(OR ARYL) PHOSPHATES: EVALUATION OF FIRE BEHAVIOR AND THERMAL STABILITY" JOURNAL OF APPLIED POLYMER SCIENCE, vol. 62, no. 11, 12 December 1996, pages 1855-1868, XP000635280 see abstract</p>	1-29

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/US 98/13618

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0754728 A	22-01-1997	DE 19525714 C DE 19622125 A JP 9104804 A	03-07-1997 04-12-1997 22-04-1997
EP 0029683 A	03-06-1981	US 4276392 A JP 56076468 A	30-06-1981 24-06-1981